


C | 4ì

y | ä ä
 y ¶ ä!ÿß v8 gÉ ä h
 y U* *A•¼²-ÿß v
 y ³²° O ò
 y ...^a y ÿ+ÿ Q< ÿ+^a Q<
 y ¶•y' y " k 9' k?è'
 y /6 9 ;2 tDÓ kBx~C Ú J ê Ë
 y 9+2<
 y U 9 è)RGYY / *O\OYOUT .•«`
 y vÅ'

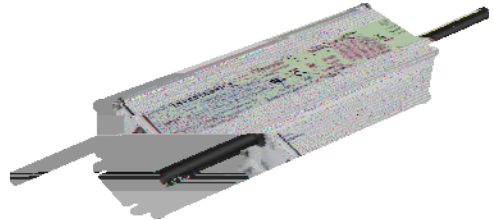

C | 5 é

| p ï ´ ÿ WÖ | u WÔ p ï š p | 8 Ô ´ ÿ | î ÿ ÿ | î p Ô 8 ÿ | £ Ü ï p ´ | J ´ | ´ d | | ¹ Y |
|---------------|-----------------|------------|----------------------------|--------------|--------------|-------|--------|--------|------------------------------|
| | | | | | | | 120Vac | 220Vac | |
| 500-1050mA | 700-1050mA | 700 mA | 90~305 Vac/ 127~300 Vdc | 95~286Vdc | 200W | 93.5% | 0.99 | 0.96 | EUP-200S105ST |
| 850-1500mA | 1050-1500mA | 1050 mA | 90~305 Vac/ 127~300 Vdc | 67~190Vdc | 200W | 93.5% | 0.99 | 0.96 | EUP-200S150ST |
| 1000-2100mA | 1400-2100mA | 1400 mA | 90~305 Vac/ 127~300 Vdc | 48~143Vdc | 200W | 93.0% | 0.99 | 0.96 | EUP-200S210ST |
| 1750-3500mA | 2450-3500mA | 2800 mA | 90~305 Vac/ 127~300 Vdc | 29 ~ 82Vdc | 200W | 93.0% | 0.99 | 0.96 | EUP-200S350ST ⁽⁴⁾ |
| 3150-5600mA | 3850-5600mA | 4900 mA | 90~305 Vac/ 127~300 Vdc | 18 ~ 52Vdc | 200W | 92.0% | 0.99 | 0.96 | EUP-200S560ST ⁽⁴⁾ |

l u g h = ¶ äËÿÿß v8

g h•š 98 y;2 ,)) <G l ê <J l! ÿ Uy <G l ê <J l g" 19 h

g h y i Ú ^ y ÿ ú k <G l g i • † • " h

g h 9+2< ÿß

Î 4ì x

| ¿ d | £ 3 š | À 1 š | £ Ü š | Ô I |
|-----------------|--------|-------|-----------------------|---|
| ÿ µ 9 8 | 90 Vac | - | 305 Vac | 127~300 Vdc |
| ÿ µ È ä 8 | 47 Hz | - | 63 Hz | |
| ¥ v | - | - | 0.75 MIU | UL8750; 277Vac/ 60Hz k Ä N ^a |
| | - | - | 0.70 mA | IEC60598-1; 240Vac/ 60Hz k Ä N ^a |
| ÿ µ v | - | - | 2.15 A | ¿ ú k < G I |
| | - | - | 1.1 A | ¿ ú k < G I |
| ~ ... v g / Z h | - | - | 1.95 A ² s | < G I k - ê “ g Ô Ñ o h k / V Q / V Q 4 Ô ž • # S Y z ! Õ → @ f ~ ... v ¼ ¿ |
| ä œ f | 0.9 | - | - | < G I .` ¿ ú |
| È ´ f â 1 | - | - | 20% | = |
| È ´ f â 1 | - | - | 10% | < G I .` ¿ ú = |

Î 4ì x

| ¿ d | £ 3 š | À 1 š | £ Ü š | Ô I |
|------------------------|----------|---------|----------|---------------|
| v ¶ † | -5%loset | - | 5%loset | ¿ ú |
| ÿ ß v — â 8 / U Y K Z | | | | |
| EUP-200S105ST | 500 mA | - | 1050 mA | |
| EUP-200S150ST | 850 mA | - | 1500 mA | |
| EUP-200S210ST | 1000 mA | - | 2100 mA | |
| EUP-200S350ST | 1750 mA | - | 3500 mA | |
| EUP-200S560ST | 3150mA | - | 5600 mA | |
| È ä ÿ ß v — â 8 | | | | |
| EUP-200S105ST | 700 mA | - | 1050 mA | |
| EUP-200S150ST | 1050 mA | - | 1500 mA | |
| EUP-200S210ST | 1400 mA | - | 2100 mA | |
| EUP-200S350ST | 2450 mA | - | 3500 mA | |
| EUP-200S560ST | 3850 mA | - | 5600 mA | |
| È ÿ ß v ¼ f V Q V Q | - | 5%lomax | 10%lomax | ¿ ú k 3 .` (= |
| " .` ÿ ß v ¼ f V Q V Q | - | 2%lomax | - | ¿ ú |
| o Ì v | - | - | 10%lomax | ¿ ú |
| q ú ÿ ß 9 | | | | |
| EUP-200S105ST | - | - | 320 V | |
| EUP-200S150ST | - | - | 220 V | |
| EUP-200S210ST | - | - | 160 V | |
| EUP-200S350ST | - | - | 100 V | |
| EUP-200S560ST | - | - | 60 V | |

Î Þàì x

| ¿ d | £ 3 š | À 1 š | £ Ü š | Ô l |
|------------|-------|----------|--------|-----------------|
| ¿ Å² ... ä | - | - | ± 0.5% | ¿ ú |
| ¿ ú² ... ä | - | - | ± 1.5% | |
| •Ñ o ž• | - | - | 1.0 s | < G l ¿ ú |
| | - | - | 0.5 s | < G l ¿ ú |
| “†⊙f | - | 0.03%/°C | - | Ó “# °C d:l ÅÝ› |

I u ñ Ā Ā @ f ⊙ “ † °) Ò Ñ ñ O y Á ° › k Ô ð h ç ” Û o ž

P á é

| ¿ d | £ 3 š | À 1 š | £ Ü š | Ô l |
|-------------------------|-------|-------|-------|------------------|
| ä @120Vac | | | | |
| EUP-200S105ST | | | | |
| I _o = 700 mA | 88.5% | 90.5% | - | |
| I _o =1050 mA | 86.0% | 88.0% | - | |
| EUP-200S150ST | | | | |
| I _o =1050 mA | 88.0% | 90.0% | - | |
| I _o =1500 mA | 86.0% | 88.0% | - | |
| EUP-200S210ST | | | | ¿ ú k q ê “ z |
| I _o =1400 mA | 88.0% | 90.0% | - | Ò Ñ ž k ä ‘ z³ |
| I _o =2100 mA | 85.5% | 87.5% | - | |
| EUP-200S350ST | | | | |
| I _o =2450 mA | 87.5% | 89.5% | - | |
| I _o =3500 mA | 85.0% | 87.0% | - | |
| EUP-200S560ST | | | | |
| I _o =3850 mA | 87.0% | 89.0% | - | |
| I _o =5600 mA | 84.5% | 86.5% | - | |
| ä @220Vac | | | | |
| EUP-200S105ST | | | | |
| I _o = 700 mA | 91.5% | 93.5% | - | |
| I _o =1050 mA | 90.0% | 92.0% | - | |
| EUP-200S150ST | | | | |
| I _o =1050 mA | 91.5% | 93.5% | - | |
| I _o =1500 mA | 89.5% | 91.5% | - | |
| EUP-200S210ST | | | | ¿ ú k q ê “ z |
| I _o =1400 mA | 91.0% | 93.0% | - | Ò Ñ ž k ä ‘ z³ |
| I _o =2100 mA | 88.5% | 90.5% | - | |
| EUP-200S350ST | | | | |
| I _o =2450 mA | 91.0% | 93.0% | - | |
| I _o =3500 mA | 88.5% | 90.5% | - | |
| EUP-200S560ST | | | | |
| I _o =3850 mA | 90.0% | 92.0% | - | |
| I _o =5600 mA | 88.0% | 90.0% | - | |

P á é

| ? | £ 3 š | À 1 š | £ Ü š | Ô I |
|--|--|--|--|--|
| ä @277Vac EUP-200S105ST I _o = 700 mA I _o =1050 mA EUP-200S150ST I _o =1050 mA I _o =1500 mA EUP-200S210ST I _o =1400 mA I _o =2100 mA EUP-200S350ST I _o =2450 mA I _o =3500 mA EUP-200S560ST I _o =3850 mA I _o =5600 mA | 92.0% 90.5% 92.0% 90.0% 91.5% 89.0% 91.5% 89.0% 90.5% 88.0% | 94.0% 92.5% 94.0% 92.0% 93.5% 91.0% 93.5% 91.0% 92.5% 90.0% | - - - - - - - - - - | ž ú k q ê “ z Ò Ñ ž k ä ‘ z³ |
| u® — { ž ž • | - | 329,000 Hours | - | < G I ê “ - ž ú 3/2 .*(1 |
| . x ž • | - | 85,000 Hours | - | < G I k ž ú k Ó “ - k i Õ Ñ @ Á . x ¼ ž |
| • Ó “ | -40°C | - | +89°C | |
| À ‘ Ó “ | -40°C | - | +75°C | v Á ‘ ñ + • Á ‘ Ó “ |
| ¥ “ † | -40°C | - | +85°C | ~ † : 5%RH to 100%RH |
| > * 6 * 2 ~ = ~ . D œ 2 ~ = ~ . | | | | m 5 ö > * ~ ~ ~ ~ |
| Ô M | - | 1100 g | - | |

I u ñ Ä Ä @ f ® “ † °) Õ Ñ ñ O y Á ° > k Ô ð h ç “ Û o ž

μ Ô Á x Ô


| μ ù ç | x Ô |
|-------------------------|--|
| UL/CUL | UL8750,CAN/CSA-C22.2 No. 250.13 |
| CE | EN 61347-1, EN61347-2-13 |
| KS | KS C 7655 |
| + 3 / x Ô | Ô I |
| EN 55015 ⁽¹⁾ | Conducted emission Test & Radiated emission Test |
| EN 61000-3-2 | Harmonic current emissions |
| EN 61000-3-3 | Voltage fluctuations & flicker |

μ Ô Â x Ô


| + 3/ x Ô | Ô I |
|----------------------------|---|
| FCC Part 15 ⁽¹⁾ | ANSI C63.4 Class B |
| | This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation. |
| EMS x Ô | Ô I |
| EN 61000-4-2 | Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge |
| EN 61000-4-3 | Radio-Frequency Electromagnetic Field Susceptibility Test-RS |
| EN 61000-4-4 | Electrical Fast Transient / Burst-EFT |
| EN 61000-4-5 | Surge Immunity Test: AC Power Line: line to line 6 kV, line to earth 10 kV ⁽²⁾ |
| EN 61000-4-6 | Conducted Radio Frequency Disturbances Test-CS |
| EN 61000-4-8 | Power Frequency Magnetic Field Test |
| EN 61000-4-11 | Voltage Dips |
| EN 61547 | Electromagnetic Immunity Requirements Applies To Lighting Equipment |

l g h › á +3/ ö Õ k x 9 › • ° À © Ĩ %² B ā k - È ` ° À Ä € — Õ g +3/ ,¼ G • ož
 g h ø g ó 9 y i ž y 9 Ü ~ ÿ μ € \$ H } y ' N ª • • x á Y > y P K g ĩ k - } t ž Å ª g " k Y
 ... 2 Ü ~ Ä B H } y ' Å • @ • / +) ož - y i è e k Y > y P K g ĩ • À t M •
 x k Y Ê Ö ç + ª ~ ... ' k w G ' P K g ĩ € \$ \$ • U ' Å N † ož


› • Ž

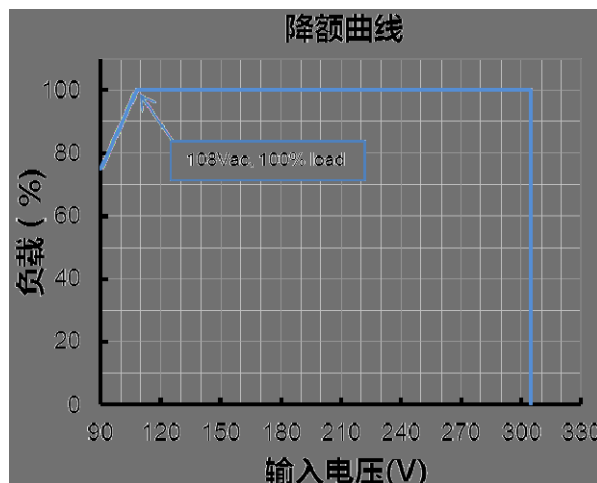


- w * Ô t • Ž

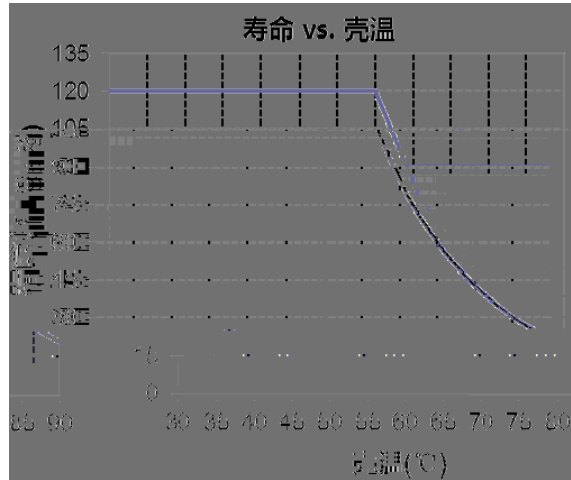

_ f • Ž

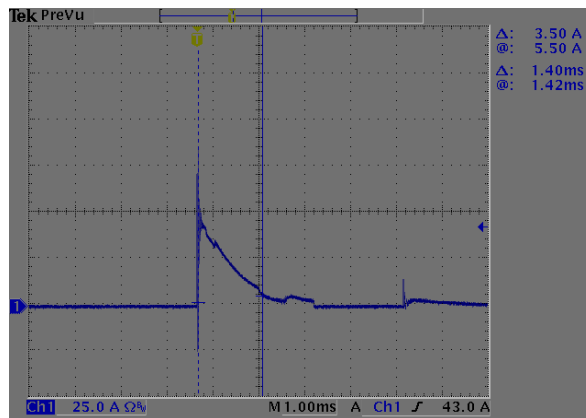


] ' • Ž

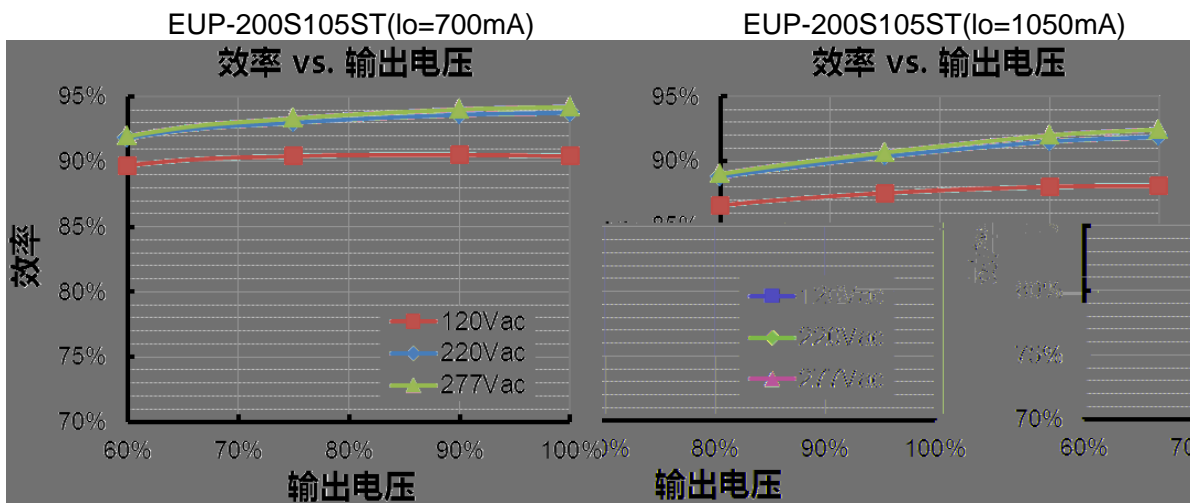


EUP-200S150ST(Io=1050mA)

效率 vs. 输出电压

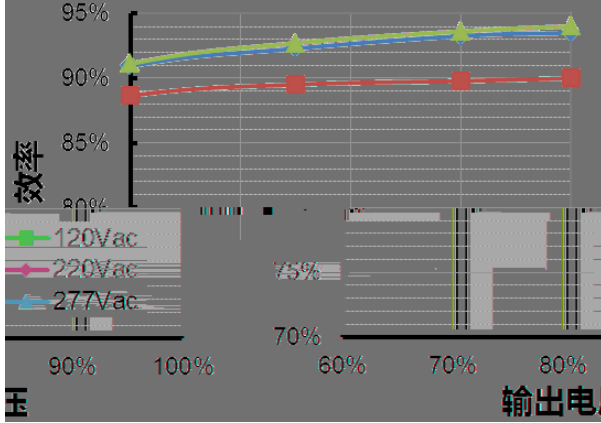


EUP-200S150ST(Io=1500mA)

效率 vs. 输出电压

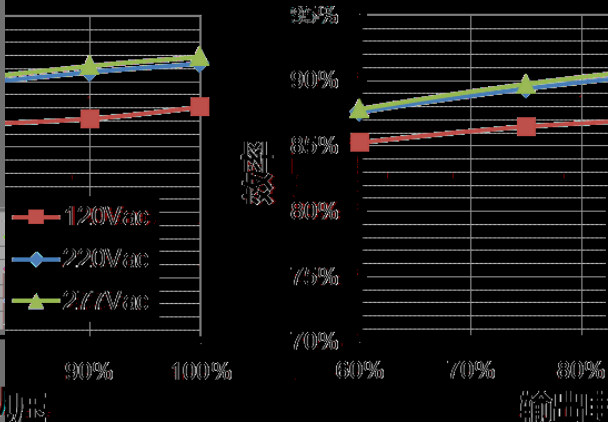


EUP-200S210ST(Io=1400mA)

效率 vs. 输出电压

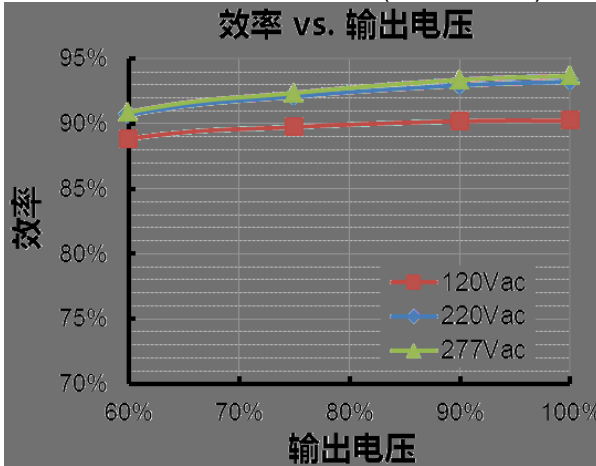


EUP-200S210ST(Io=2100mA)

效率 vs. 输出电压

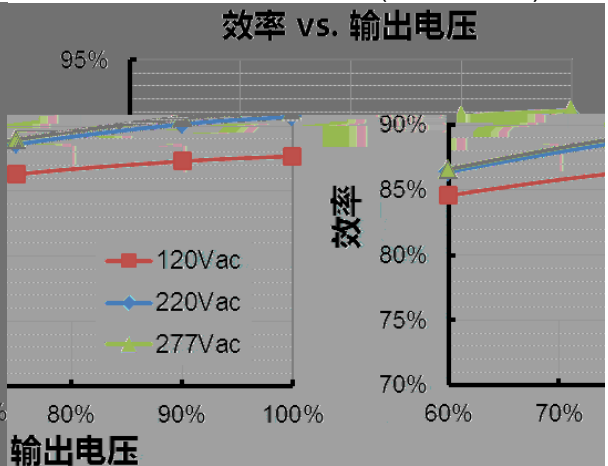


EUP-200S560ST(Io=3850mA)

效率 vs. 输出电压

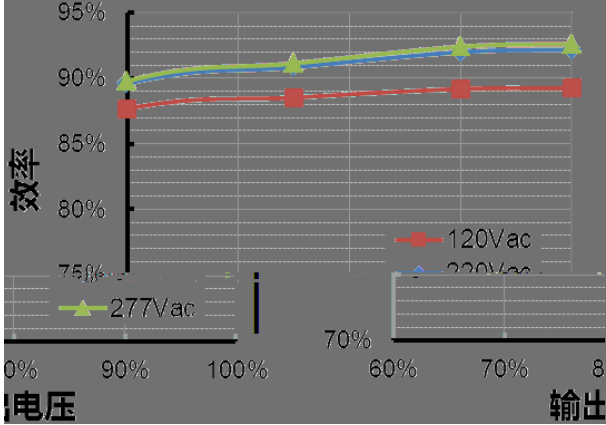


EUP-200S560ST(Io=5600mA)


效率 vs. 输出电压

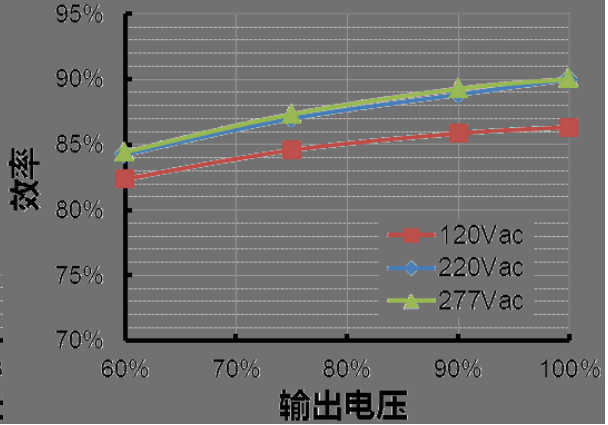

↳ d • Ž

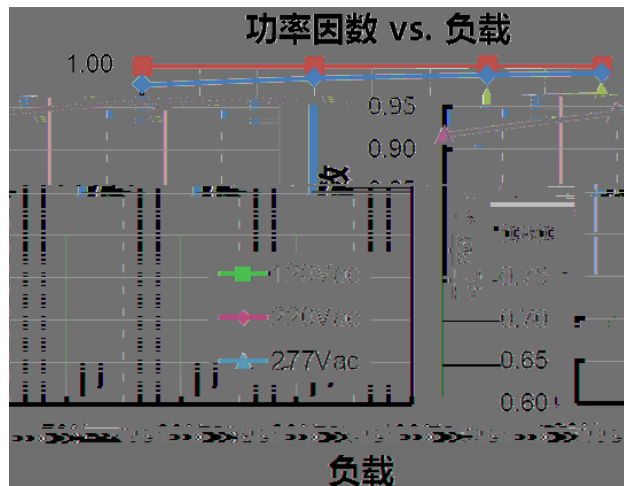

5 f G á • Ž

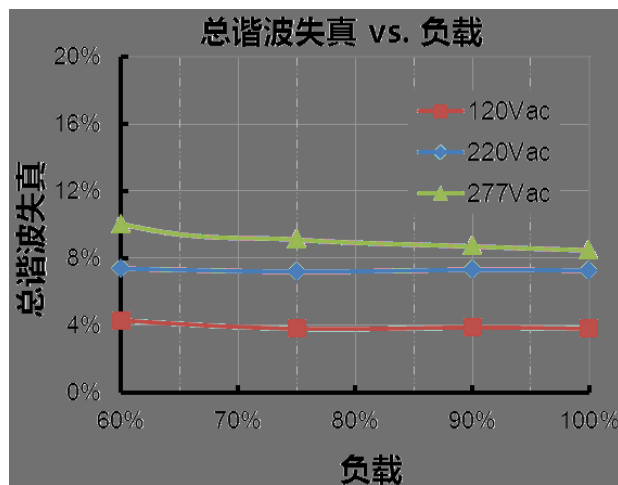

• õ x

| ? | d | Ô I |
|-----|---|---|
| “ | ‘ | v% "ož "†"ž k v Ê Öož |
| ? è | ‘ | Ê Ö% "ož ? è ž k D } — C oož ? è † "ž k U Ê Öož |
| 9 | ‘ | ÿ ß 9 k 'ò "• 8 Äož |

Î Þ Ô W \ Y • » f ´

Z EUP-200S105ST

| • » f ´ | | | | Î Þ Ô W f ´ (loset) | Î Þ Ô 8 Ÿ | | Ô I |
|---------|-----|-----|-----|------------------------|-----------|-------|-----------------|
| 1 | 2 | 3 | 4 | À 1 š | £ 3 š | £ Ü š | / |
| ON | ON | ON | ON | 1050mA | 95V | 190V | É ä ÿ ß v — à 8 |
| ON | ON | ON | OFF | 1000mA | 100V | 200V | |
| ON | ON | OFF | ON | 950mA | 105V | 210V | |
| ON | ON | OFF | OFF | 900mA | 111V | 222V | |
| ON | OFF | ON | ON | 850mA | 118V | 235V | |
| ON | OFF | ON | OFF | 800mA | 125V | 250V | |

Z EUP-200S150ST

| •» f´ | | | | Î Ð Ô W f´ (loset) | Î Ð Ô 8 Ÿ | | Ô I |
|-------|-----|-----|-----|-----------------------|-----------|-------|----------------|
| 1 | 2 | 3 | 4 | À 1 š | £ 3 š | £ Ü š | / |
| ON | ON | ON | ON | 1500mA | 67V | 133V | É ä ÿ ß v— å 8 |
| ON | ON | ON | OFF | 1450mA | 69V | 138V | |
| ON | ON | OFF | ON | 1400mA | 72V | 143V | |
| ON | ON | OFF | OFF | 1350mA | 74V | 148V | |
| ON | OFF | ON | ON | 1300mA | 77V | 154V | |
| ON | OFF | ON | OFF | 1250mA | 80V | 160V | |
| ON | OFF | OFF | ON | 1200mA | 84V | 167V | |
| ON | OFF | OFF | OFF | 1150mA | 87V | 174V | |

Z EUP-200S210ST

| • » f ´ | | | | Î Þ Ô W f ´ (loset) | Î Þ Ô 8 Ỹ | | Ô I | |
|---------|-----|-----|-----|------------------------|-----------|-------|-----------------|-----------------|
| 1 | 2 | 3 | 4 | À ¹ š | £ 3 š | £ Ü š | / | |
| ON | ON | ON | ON | 2100mA | 48V | 95V | É ä ÿ ß v — á 8 | |
| ON | ON | ON | OFF | 2000mA | 50V | 100V | | |
| ON | ON | OFF | ON | 1900mA | 53V | 105V | | |
| ON | ON | OFF | OFF | 1800mA | 56V | 111V | | |
| ON | OFF | ON | ON | 1700mA | 59V | 118V | | |
| ON | OFF | ON | OFF | 1600mA | 63V | 125V | | |
| ON | OFF | OFF | ON | 1500mA | 67V | 133V | | |
| ON | OFF | OFF | OFF | 1400mA | 72V | 143V | | |
| OFF | ON | ON | ON | 1300mA | 77V | 143V | | ´ ä ÿ ß v — á 8 |
| OFF | ON | ON | OFF | 1200mA | 84V | 143V | | |
| OFF | ON | OFF | ON | 1100mA | 91V | 143V | | |
| OFF | ON | OFF | OFF | 1000mA | 100V | 143V | | |

Z EUP-200S350ST

| • » f ´ | | | | Î Þ Ô W f ´ (loset) | Î Þ Ô 8 Ỹ | | Ô I |
|---------|-----|-----|-----|------------------------|-----------|-------|-----------------|
| 1 | 2 | 3 | 4 | À ¹ š | £ 3 š | £ Ü š | / |
| ON | ON | ON | ON | 3500mA | 29V | 57V | É ä ÿ ß v — á 8 |
| ON | ON | ON | OFF | 3325mA | 30V | 60V | |
| ON | ON | OFF | ON | 3150mA | 32V | 63.5V | |
| ON | ON | OFF | OFF | 2975mA | 34V | 67V | |
| ON | OFF | ON | ON | 2800mA | 36V | 71.5V | |
| ON | OFF | ON | OFF | 2625mA | 38V | 76V | |
| ON | OFF | OFF | ON | 2450mA | 41V | 82V | |
| ON | OFF | OFF | OFF | 2275mA | 44V | 82V | |
| OFF | ON | ON | ON | 2100mA | 48V | 82V | ´ ä ÿ ß v — á 8 |
| OFF | ON | ON | OFF | 1925mA | 52V | 82V | |
| OFF | ON | OFF | ON | 1750mA | 57V | 82V | |

' [b ç

| ' X • N | • - | ' X 5 é | | |
|------------|-----|---------|---|-------------------------------|
| | | • ù | Q | è |
| 2017-10-19 | A | G g | / | / |
| 2018-04-25 | B | D } T | | ³ / ₄ • |
| | | Ñ ã £ | | ³ / ₄ • |